

CIBUM CERAMIC PASTE FG



PRODUCT DESCRIPTION

CIBUM CERAMIC PASTE FG is a white, non-toxic, grease alike compound based in a semi-synthetic oil blend with an extreme high solid lubricant content. Ceramic Paste FG is designed for use as an assembly for lubricating bushes, sliding surfaces and as an anti-seize compound for threaded fasteners.

The compound is designed to prevent damage during start-up and protect against premature wear during the running-in period.

CIBUM CERAMIC PASTE FG is available as bulk item in 18 or 180 KG pail or drum - but also as a 250 grams brush jar as a optimal tool for applying the compound perfectly to the surface.

CIBUM CERAMIC PASTE FG is compatible with most mineral oils, synthetic oils and seals (is not compatible with poly-glycol based lubricants).

CIBUM CERAMIC PASTE FG is registered under No. xxxxxx at NSF according to H1 regulations for lubricants with incidental food contact.

CIBUM CERAMIC PASTE FG do not contain genetically modified ingredients (GMO), or hydrogenated fats. CIBUM CERAMIC PASTE FG is suitable for Kosher applications and for Halal applications.

CIBUM CERAMIC PASTE FG is acceptable for incidental Food Contact (H1) and meets the requirements FDA § 27 of Article 21 CFR 178.3570.

CIBUM CERAMIC PASTE FG meet the European Parliament and Council Regulation (EC) No 1935/2004 of 27 October 2005, as Decree No 502 of 19 August 2005.


TECHNICAL DATA

Base Oil	Semi-Synthetic Oil Blend	
Texture	Smooth	
Color	Visual	White
NLGI Grade	ASTM D217	2
Solid Content	> 30 %	
Base Oil Viscosity at 40° C	ASTM D7152	265 cSt
Penetration 60 Strokes	ISO 2137	265-295
Water Wash Out at 38°C	ISO 11009	< 6 %
Four Ball Weld Load	IP 239	600 kg
Coefficient of frictions	0.12	
Recommended Temperature Range as lubricant	-30°C to +155°C	
Recommended Temperature Range as anti-seize compound	-30°C to +1100°C	

Excellent water resistance

Extreme scuffing protection

Superior anti-seize properties

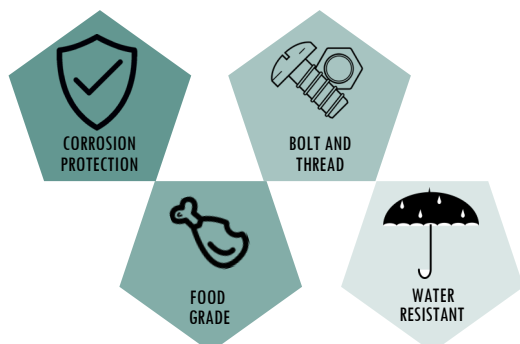

Shelf life: 3 years from date of manufacture, Batch coding durability is printed on label to each unit.

Storage: Store unopened in 5° - 20°C, must be stored dry and away from products with odors.

Cibum Lubricants
Stokagervej 8E
8240 Risskov
Denmark

Phone + 45 36981899

Web: cibum-lubricants.com

Mail: mail@cibum-lubricants.com