

CIBUM FLUID ISO 68



PRODUCT DESCRIPTION

CIBUM FLUID ISO 68 is based on synthetic polyalphaolefine oils and polymers with high performance additives.

Especially suitable for very low temperature applications in food and pharmaceutical processing industries. With a wide temperature range plus excellent oxidation stability which result in extended lubrication intervals thus reducing operating costs in hydraulic systems.

It could be applied by using immersion, immersion circulation or injection. Also possible be applied by brush or drip-feed lubrication for chains applications.

CIBUM FLUID ISO 68 is miscible with mineral oils and polyalphaolefin oils. However, we still recommend to cleaning the oil circulation system before using CIBUM FLUID ISO 68 for the first time. Compatible with most seal gaskets normally used in food machinery lubrication systems. A compatibility test is always recommended to be carried out. (e.g. EPDM)

CIBUM FLUID ISO 68 is registered under No.167023 at NSF according to H1 regulations for lubricants with incidental food contact. CIBUM FLUID ISO 68 does not content any mineral oils to be able to meet the EU Commission Recommendation 2017/84 of 16 January 2017 (MOSH & MOAH). It is manufactured in a ISO 21469 certified facility


TECHNICAL DATA

Base Oil	Synthetic Oil	
Colour	Visual	Transparent
Density	ISO 12185	836 Kg/m ³
ISO Grade	ASTM	68
Viscosity Index	ISO 2909	127
Base Oil Viscosity at -40° C	14670 cSt	
Base Oil Viscosity at 40° C	ISO 3104	68,2 cSt
Base Oil Viscosity at 100° C	ISO 3104	14,2 cSt
Flash Point	ISO 2592	247° C
Pour Point	ISO 3016	-49° C
4-ball Wear Scar	ISO 20623	0,45 mm
Copper Corrosion (3h/100° C)	ISO 2160	1a
Recommended Temperature range	-35° C to +135° C	

Fulfill HLP requirements

Excellent resistance to shear

AW/AC, Anti-oxidation, Anti-foam properties

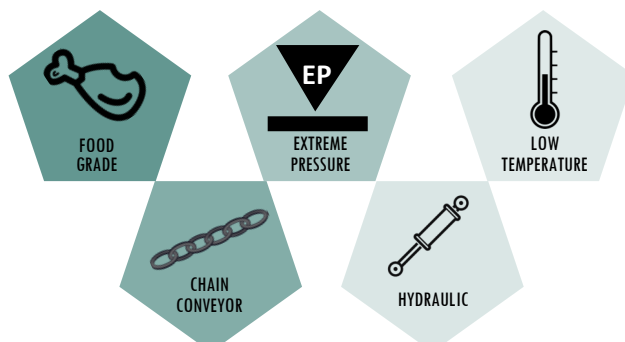

Shelf life: 5 years from date of manufacture, Batch coding durability are printed on label to each unit.

Storage: Store unopened in 5° - 20° C, must be stored dry and away from products with odors.

Cibum Lubricants
Erritsoe Mollebanke 10
7000 Fredericia
Denmark

Phone + 45 36981899

Web: cibum-lubricants.com

Mail: mail@cibum-lubricants.com